


## TF / ULTRA Hose Torch

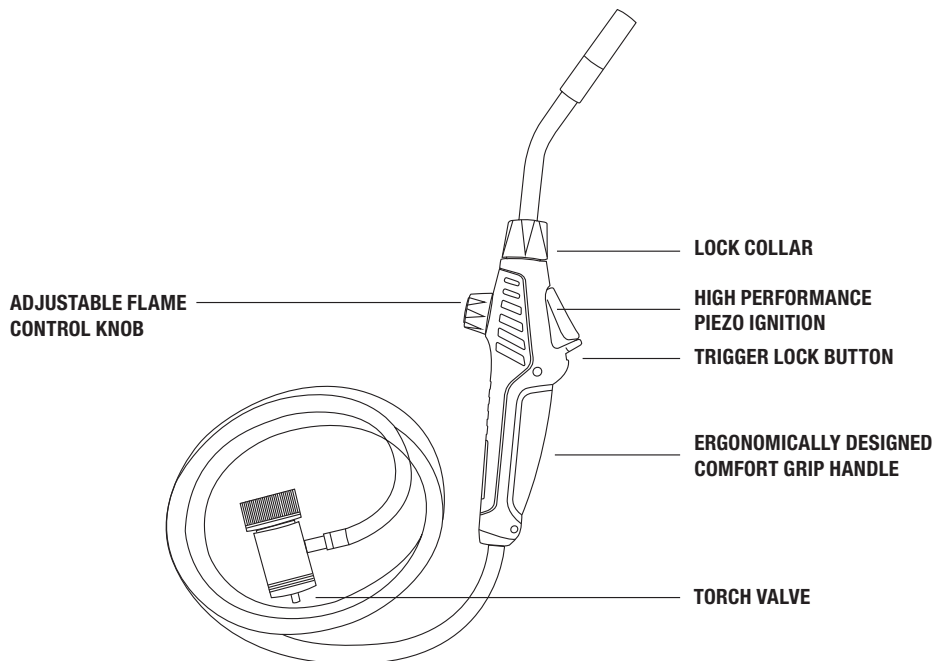

**IMPORTANT: READ THESE INSTRUCTIONS FOR USE CAREFULLY. FAMILIARISE YOURSELF WITH THE APPLIANCE BEFORE CONNECTING IT TO ITS GAS CONTAINER. KEEP THESE INSTRUCTIONS FOR FUTURE REFERENCE.**

This appliance shall only be used with disposable propylene  $\geq$  95% (115-07-01) cartridges or disposable propane  $\geq$  95% (74-98-06) certified to EN11118, with the (CGA600) BOM fitting.

IT MAY BE HAZARDOUS TO ATTEMPT TO FIT OTHER TYPES OF GAS CONTAINERS.

ONLY USE IN WELL-VENTILATED AREAS.

**CARBON MONOXIDE HAZARD - USING THIS APPLIANCE IN AN ENCLOSED SPACE MAY CAUSE DEATH. DO NOT USE IN CARAVANS, TENTS, MARINE CRAFT, CARS, MOBILE HOMES OR SIMILAR LOCATIONS.**


CAUTION: accessible parts may be very hot. Keep young children away.

### SAFETY INFORMATION

- Inspect the appliance regularly for signs of wear, leaks or incorrect operation.
- Do not modify this appliance.
- Ensure all packaging is removed prior to use.
- Check that seals between the appliance and the gas cartridge are in place and in good condition before connecting the gas cartridge.
- Do not use this appliance if it has damaged or worn seals.
- Do not use the appliance if it is leaking, damaged or does not operate properly.
- Gas cartridges shall be changed in a well-ventilated location, preferably outside, away from people and any source of ignition, such as naked flames, pilot flame, electric heaters/equipment.
- To avoid injury or damage, only ignite the torch when clear of face, hands, clothing or combustible materials.
- Always inspect your environment before igniting to ensure the area is clear of any potential ignition sources or hazards.
- The burner becomes extremely hot during and after operation. Care must be taken to avoid accidental burns.
- This appliance must be operated away from any flammable material or surfaces and materials.
- Never leave the torch unattended once lit. Extinguish the torch first ensuring it is completely out and safe before leaving unattended.
- Protect from direct sunlight. Do not expose to temperature above 50°C/120°F.
- Do not breathe gas, fumes, vapour or spray. If inhaled, move the person to a fresh air environment.
- For maximum protection, always wear safety goggles, gloves or other appropriate equipment.
- Avoid contact with eyes or skin. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

PART NO. 219034

## TF / ULTRA Hose Torch

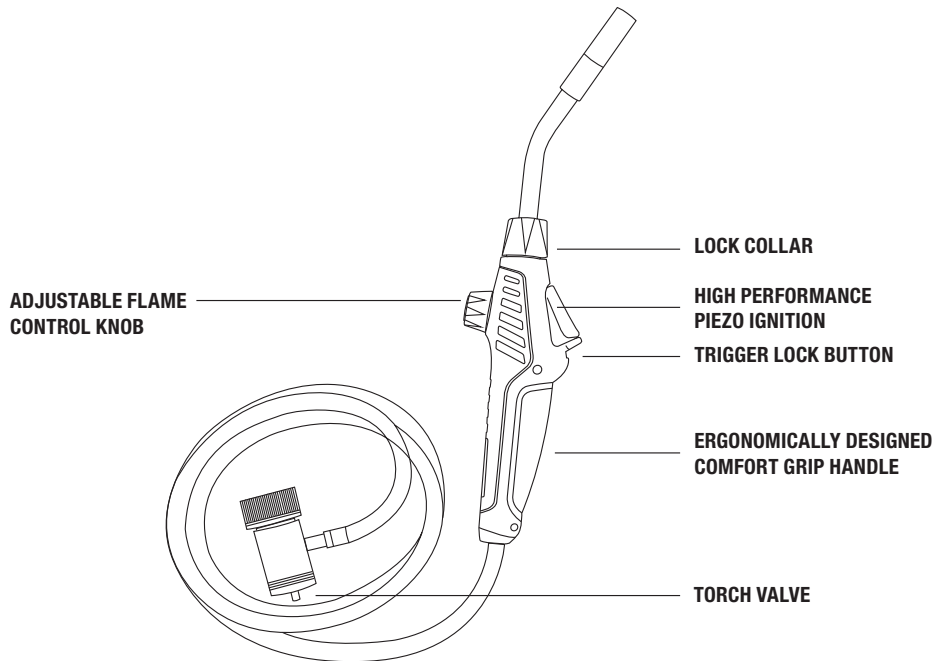

### TO ASSEMBLE

1. Ensure the flame control knob is turned off (-) fully clockwise.
2. Keep the cartridge in an upright position and place the Hose Torch valve on top of the BOM fitting.
3. Gently screw (clockwise) the valve body into the cartridge.

CAUTION - DO NOT OVER TIGHTEN.

### TO IGNITE

1. To avoid injury or damage, always point the burner away from your body and any flammable or combustible materials.
2. Turn the flame control knob (+) anti-clockwise.
3. Press the trigger to ignite the burner.
4. For a constant flame, before releasing the trigger, press the trigger lock button downwards to engage function.

### ADJUSTING THE FLAME LEVEL.

Turn the flame control knob anti-clockwise (+) to increase the flame.

Turn the flame control knob clockwise (-) to decrease the flame.

### TO EXTINGUISH

1. If the trigger lock button is engaged, press the trigger to release the trigger lock button and then release the trigger.
2. Turn the flame control knob fully clockwise to the closed position.
3. Allow the torch to cool.

### TO DISASSEMBLE

1. Ensure the burner has cooled properly.
2. Gently screw (anti-clockwise) the hose torch valve from the cartridge.
3. Replace the gas cartridge cap to keep the valve clean.

### STORAGE

- Ensure flame is completely out after use.
- Always detach Hose Torch from cartridge when not in use.
- Do not disassemble, puncture or incinerate cartridge after use.
- Make sure that the cartridge is disconnected and is stored in a well ventilated area, out of the reach of children, free from direct sunlight, heat and ignition sources. If being stored indoors, ensure that the location complies with the standard AS/NZS 1596.
- Do not store chemicals or flammable materials, or spray aerosols near this appliance.

### MAINTENANCE/SERVICING

If symptoms such as flaring burner, issues with lighting, leaks from seals or problems with gas control are identified, do not attempt to repair, return to your authorised stockist for service and maintenance.

This appliance must only be serviced by an authorised person.